


NR CURENT	FUNCTIUNE SPATIU	S / MP	Lp / ML
P1	SALA DE CLASA	54,00	29,85
P2	SALA DE CLASA	53,90	29,80
P3	GRUP SANITAR	11,45	20,00
P4	HOL	28,27	33,6
TOTAL Ac UTIL		147,62	113,25

Ac =170.73 MP
 Ac utila=147.62MP
 Acd=147.62 MP
 Vc parter=589.02 MC
 Hnivei=3.45M

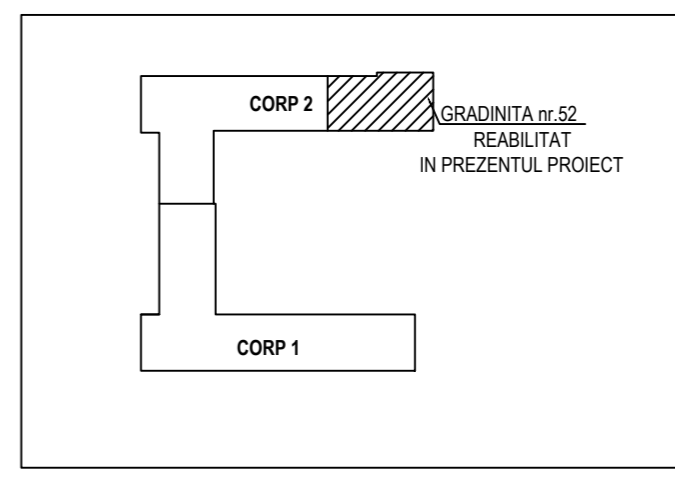

CONSTRUCTIA ESTE AMPLASATA (CONFORM P100-1/2006) IN ZONA DE VALORI DE VARF ALE ACCELERATIEI TERENULUI PENTRU CUTREMURE AVAND IMR=100 ANI=0.24g SI PERIOADEI DE CONTROL (COLT) Tc=1.00SEC
 CLASA DE IMPORTANTA "II" - STABILITA CONFORM P100-1/2006.
 CATEGORIA DE IMPORTANTA "C" - STABILITA CONFORM HGR 766/98
 GRADUL DE REZ.LA FOC "I", RISCUL DE INCENDIU "MIC" STABILITA CONFORM P118/99

VERIFICATOR	NUME	SEMNTURA	CERINTA	REFERAT/EXPERTIZA NR./DATA	REVIZIA
VERIFICATOR/ EXPERT				BENEF. UNITATEA ADMINISTRATIV TERITORIALA - BRAILA	PR.NR. 75/2008
ROCIF CONSTRUCT SC ROCIF CONSTRUCT SRL BRAILA J09755/2006, R19046335 Tel/Fax40(0)339106698				PROIECT	FAZA
				REABILITARE SCOALA CU CLASELE I-VIII, NR. 24, STR. CARABUSULUI, NR.22,MUN. BRAILA, JUD. BRAILA	DALI
SPECIFICATIE	NUME	SEMNTURA	SCARA	PLANSA	PL.NR.
SEF PROIECT	ING. MARINESCU M.		1:100	PLAN PARTER	A01
RELEVAT	ING. CHIROI A.		DATA	SITUATIA EXISTENTA	
DESENAT	ING. CHIROI A.		12.2008		